




CREATOR (CHINA) TECH CO., LTD

One-stop Self-service Kiosk Solution Provider

CRT-288-B

Dip-card reader

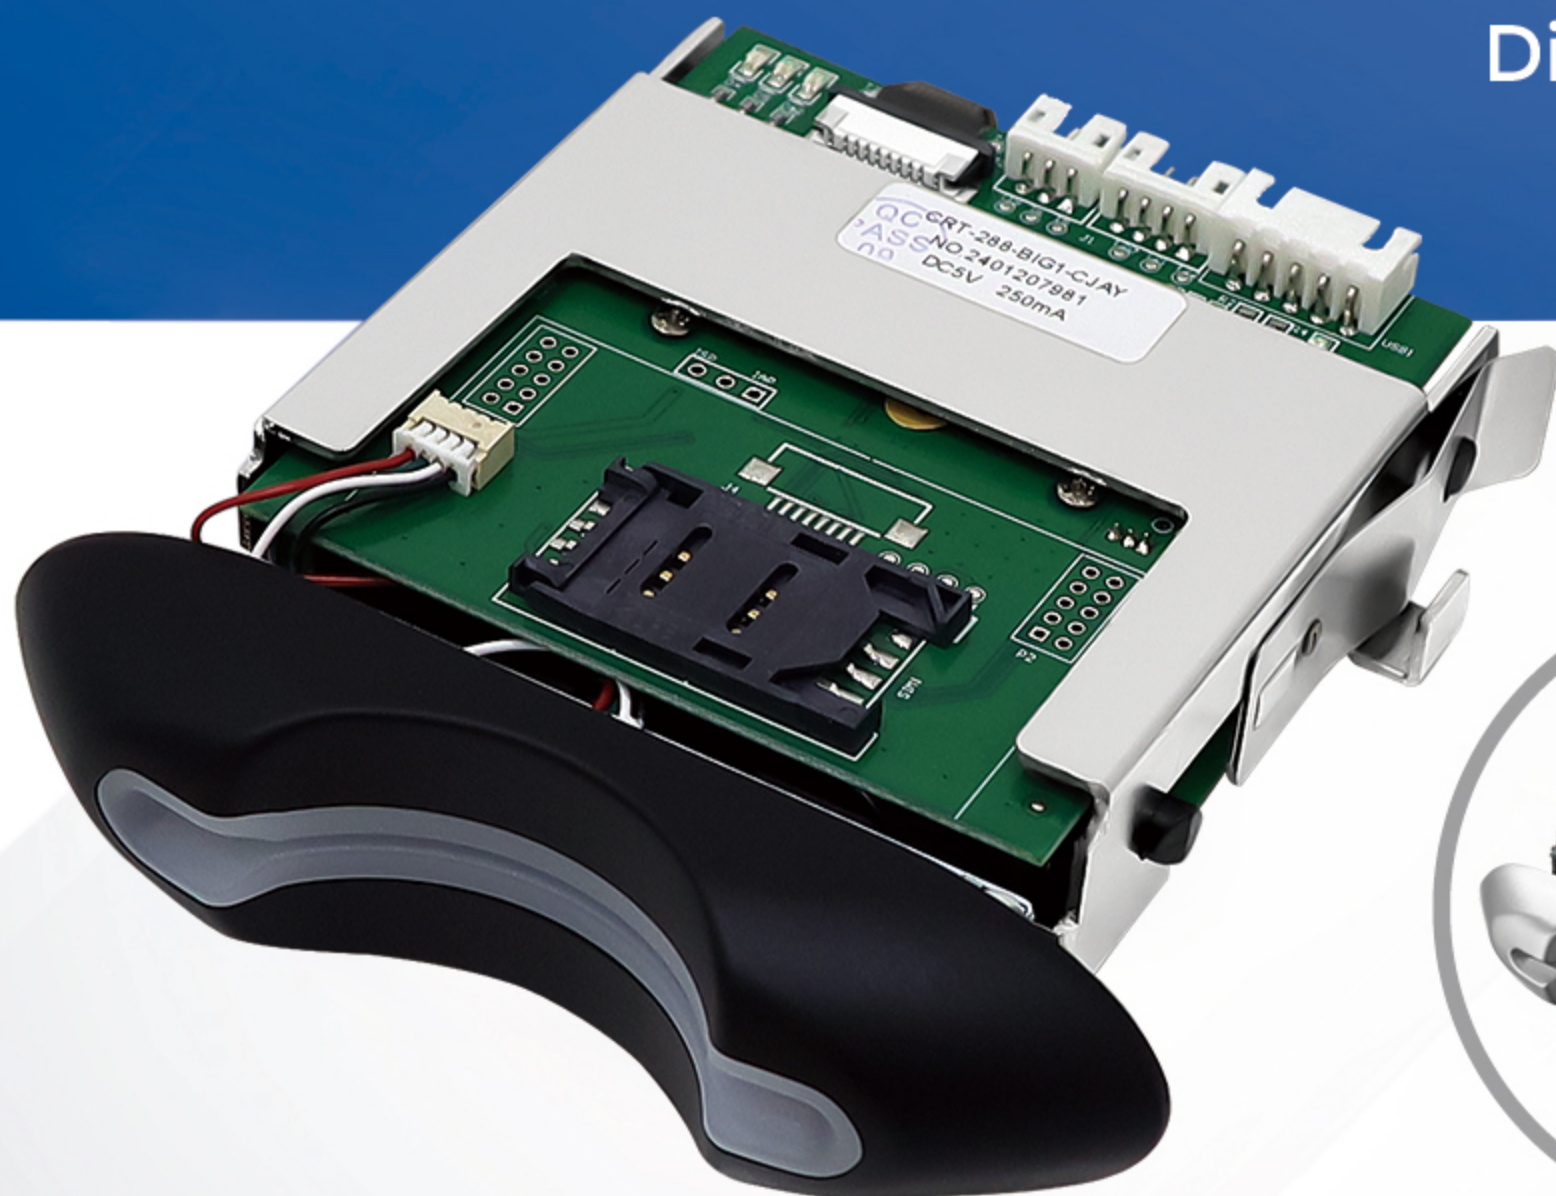

Metal Bezel



Call or email
for more info

P
+86 755 2671 0992

E
sales@china-creator.com

W
china-creator.com



Product Features

- IC/RFID card read/write, mag-stripe card read only
- High security: shutter, card latch, auto-latch function
- Interface: RS232, USB
- EMV certified



Specifications

Card type	IC Card ISO7816-1, 2, 3, 4 Support T=0、T=1 CPU Card Support T=0、T=1 PSAM Card RFID Card ISO14443 Type A & B Support Mifare 1 S50, S70, UL Card, Mifare Plus, Mifare Desfire
Card dimension	Width: 53.92~54.18 mm, Length: 85.47~85.90 mm Thickness: 0.76±0.08mm
Power supply	DC5V±5% / USB powered
Communication interface	RS-232 / USB (HID)
Operation current	< 250mA
Magnetic head	/
IC card contact	300,000 cycles
Latch mechanism	/
M.T.B.F	> 100,000hours (Electronic components only)
Environment conditions	Operation: 0~50℃ / 0~90%RH (Non-condensing) Storage: -25~80℃ / 0~95%RH (Non-condensing)
Weight	About 200g